


RFID Integration module Mini

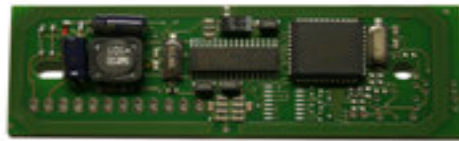

The RFID integration module Mini is a universal base plate for integration of our potted modules.

This allows you to create a million reader hardware, which can be mounted inside readily available reader housings.

Following technologies are available: LEGIC advent, LEGIC prime, NFC, MIFARE DESFire, Hitag, EM

Technical specifications:

- Dimensions: 93x40 mm
- Interface versions: Asynchron seriell (RxD, TxD) RS485-Level, Asynchron seriell (RxD, TxD) RS232-Level, Asynchron seriell (RxD, TxD) TTL-Level or Magstripe Clock/Data (TTL-Level) or Wiegand D0/D1 (TTL-Level)
- Power supply:
 - 9... 24V DC
- Address switch: 4pole for up to 16 adress
- Indications: 2 LED's (green/ red) + beeper
- Temperature range: -20°C up to +60°C
- for Integration all potted OEM modules